



REPLACEMENT SHEET

1/14

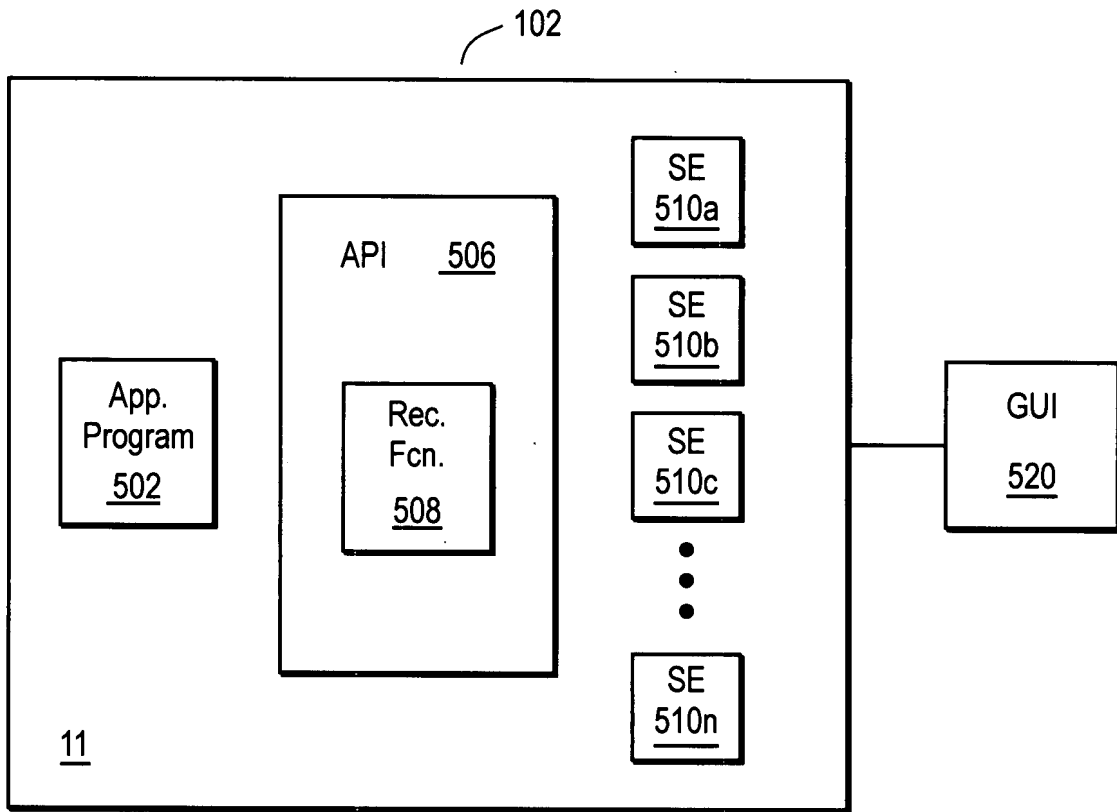


FIG. 1

2/14

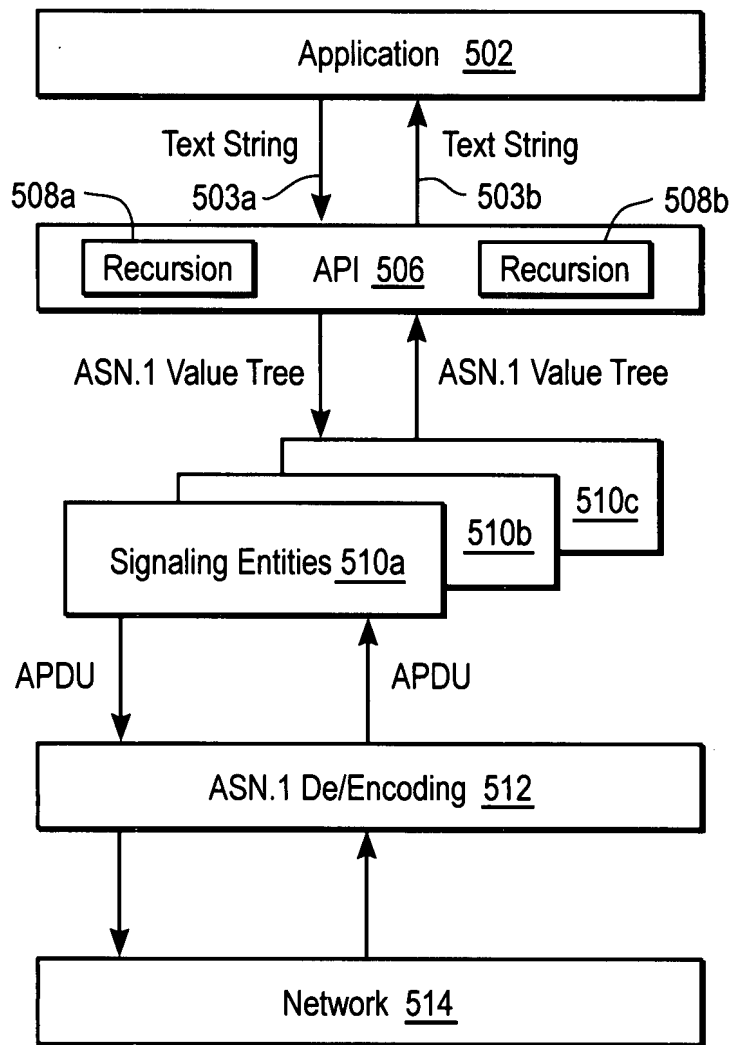


FIG. 2

3/14

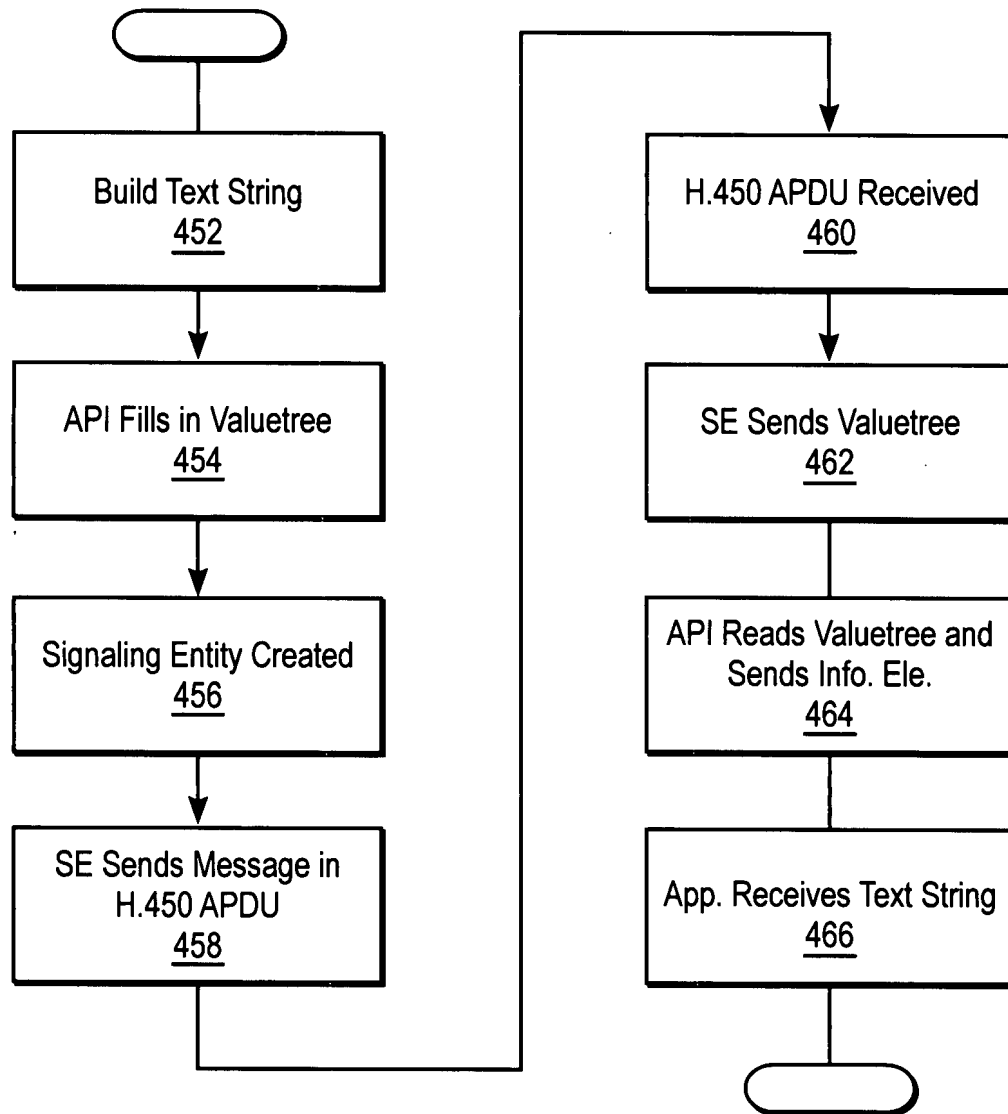


FIG. 3

4/14

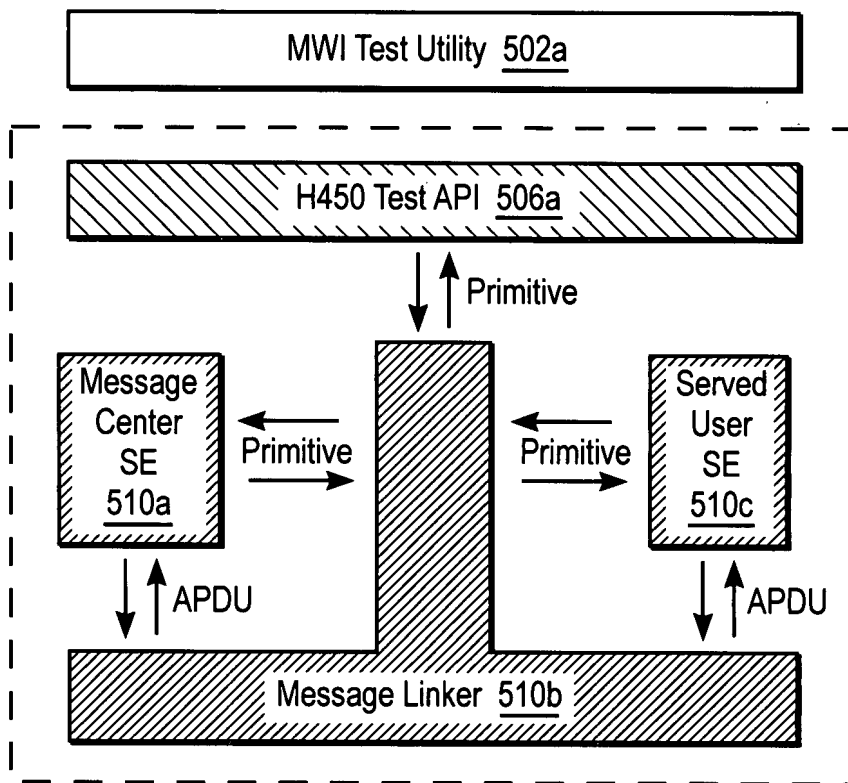


FIG. 4

The figure shows a form titled "MWIActivate" with the following fields and values:

Field	Value
servedUserNr:	serveduser@example.com
basicService	0815
msgCentreId:	4711
nbOIMessages:	1
originatingNr:	originating@example.com
timestamp:	19970621194530
priority:	7

At the bottom of the form are two buttons: "Save" and "Send". A reference number 600 is located to the right of the form.

FIG. 7

5/14

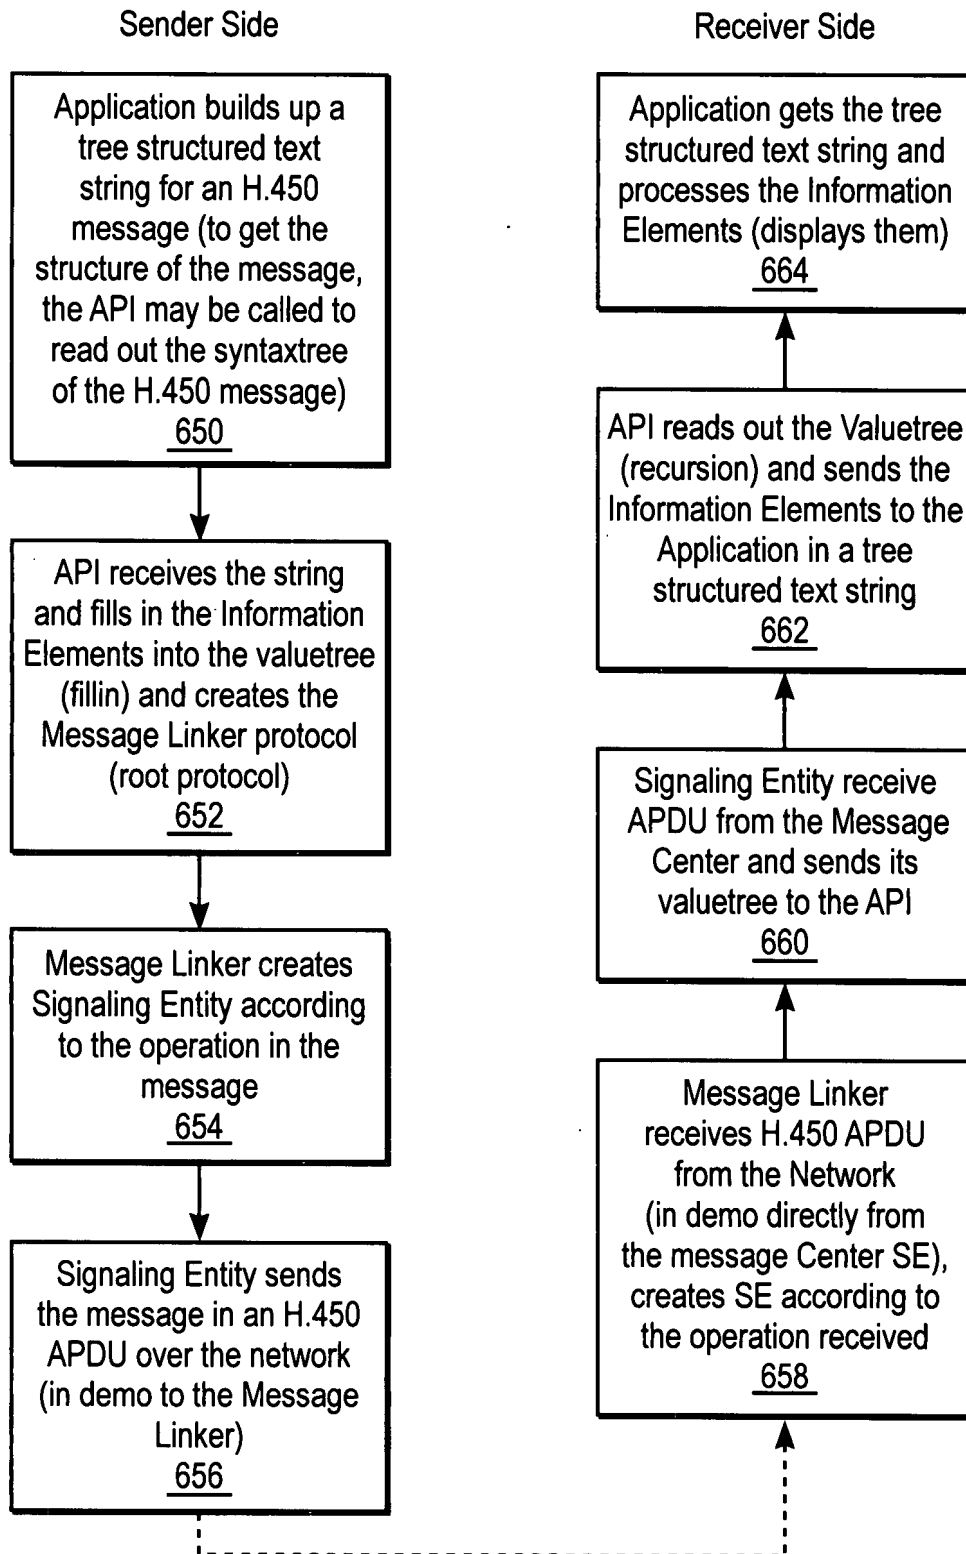


FIG. 5

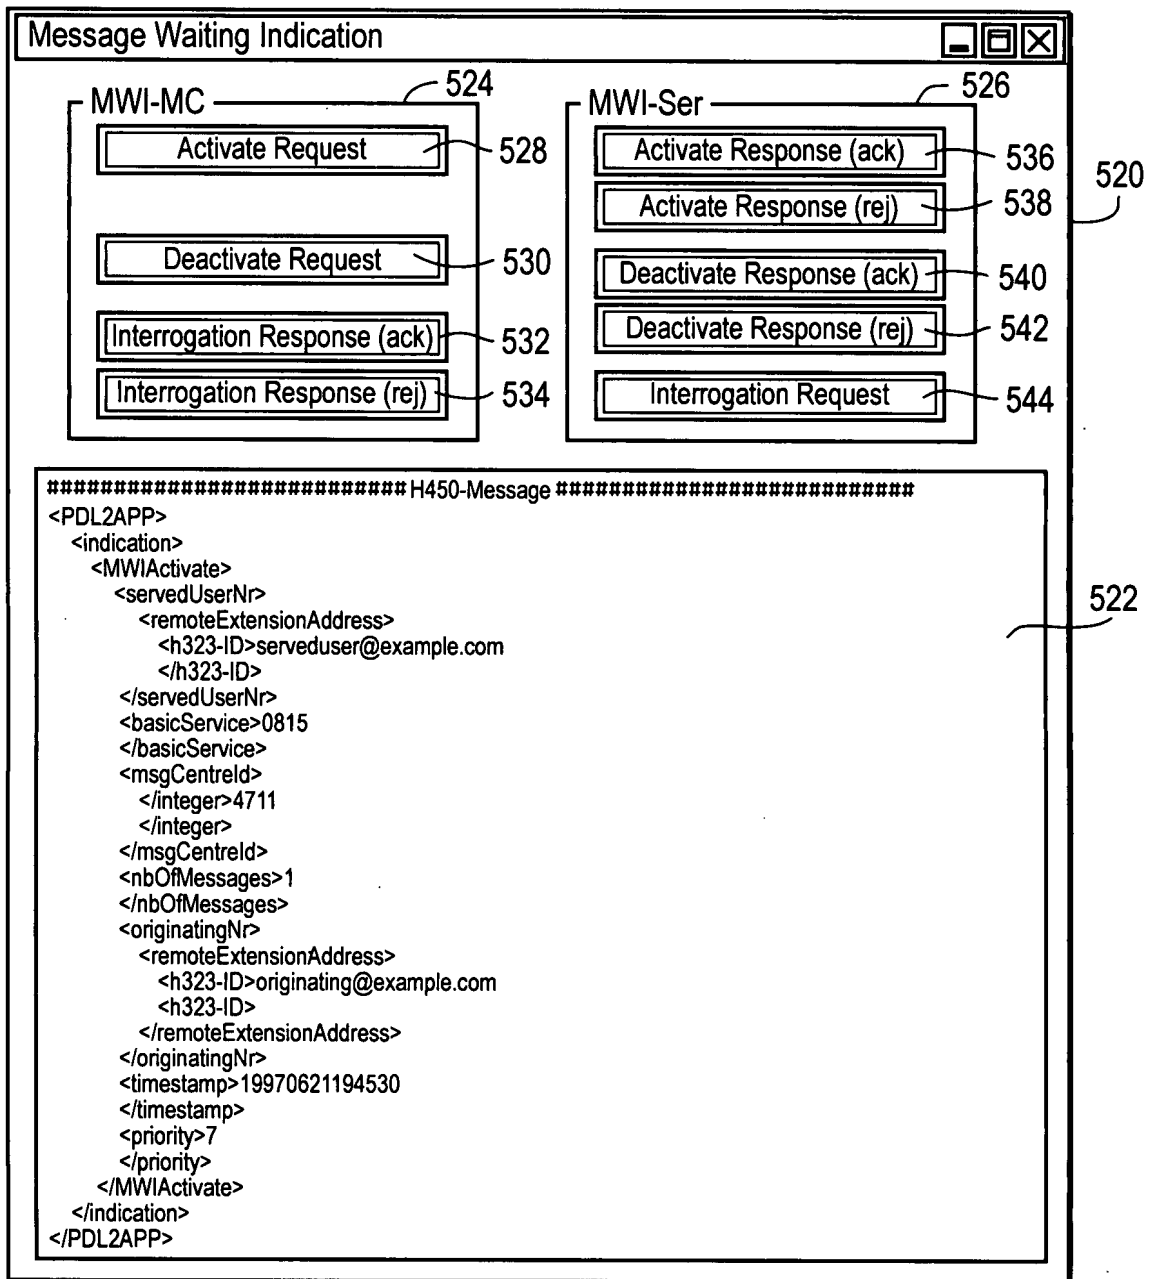


FIG. 6



8/14

H.450 Test Client v.1.0

RV Stack Version 2.1.2.3

☒ Sound Enabled

My Phone Number } 902
My Alias }

904a 904b 904c

received H450-Message

```
<H450AppSupplementaryService>
  <h2250CallSetupState
    <setup>
    </setup>
  </h2250CallSetupState>
  <h4501SupplementaryService>
    <networkFacilityExtension>
      <sourceEntity>
        <anyEntity>
        </anyEntity>
      </sourceEntity>
      <sourceEntityAddress>
        <partyNumber>
          <privateNumber>
            <privateTypeOfNumber>
              <unknown>
              </unknown>
            </privateTypeOfNumber>
            <privateNumberDigits> 123
          </privateNumberDigits>
        </partyNumber>
      </sourceEntityAddress>
    </networkFacilityExtension>
  </h4501SupplementaryService>
</H450AppSupplementaryService>
```

900 906

FIG. 9

9/14

H.450.1 Information Elements [X]

Interpreter APDU

☒ reject AnyUnrecognizedInvokePdu 953

951

Network Facility Extension

☒ 955

Source Entity 956

Entity Type: anyEntity 960a

Source Entity Address 962

☒ Value: 123 966a

Type: partyNumber 968a

Party Number 970a

Type: privateNumber 972a

Private Party Number 974a

Type: unknown 976a

Public Party Number 978a

Type: unknown 978a

IP: 15

Port: 1

Destination Entity 958

Entity: endpoint 960b

Destination Entity Address 964

☒ Value: 456 966b

Type: transportID 968b

Party Number 970b

Type: privateNumber 972b

Private Party Number 974b

Type: unknown 976b

Public Party Number 978b

Type: unknown 978b

IP: 11

Port: 2

950

954

980 Save

982 Send without APDU

984 Send with APDU

FIG. 10

10/14

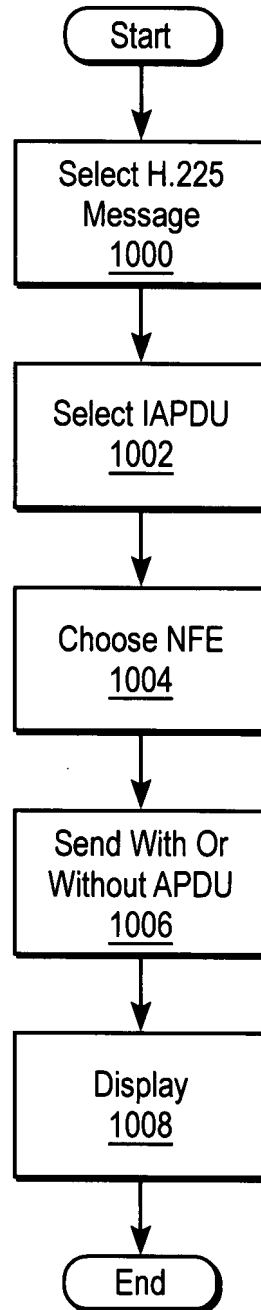


FIG. 11

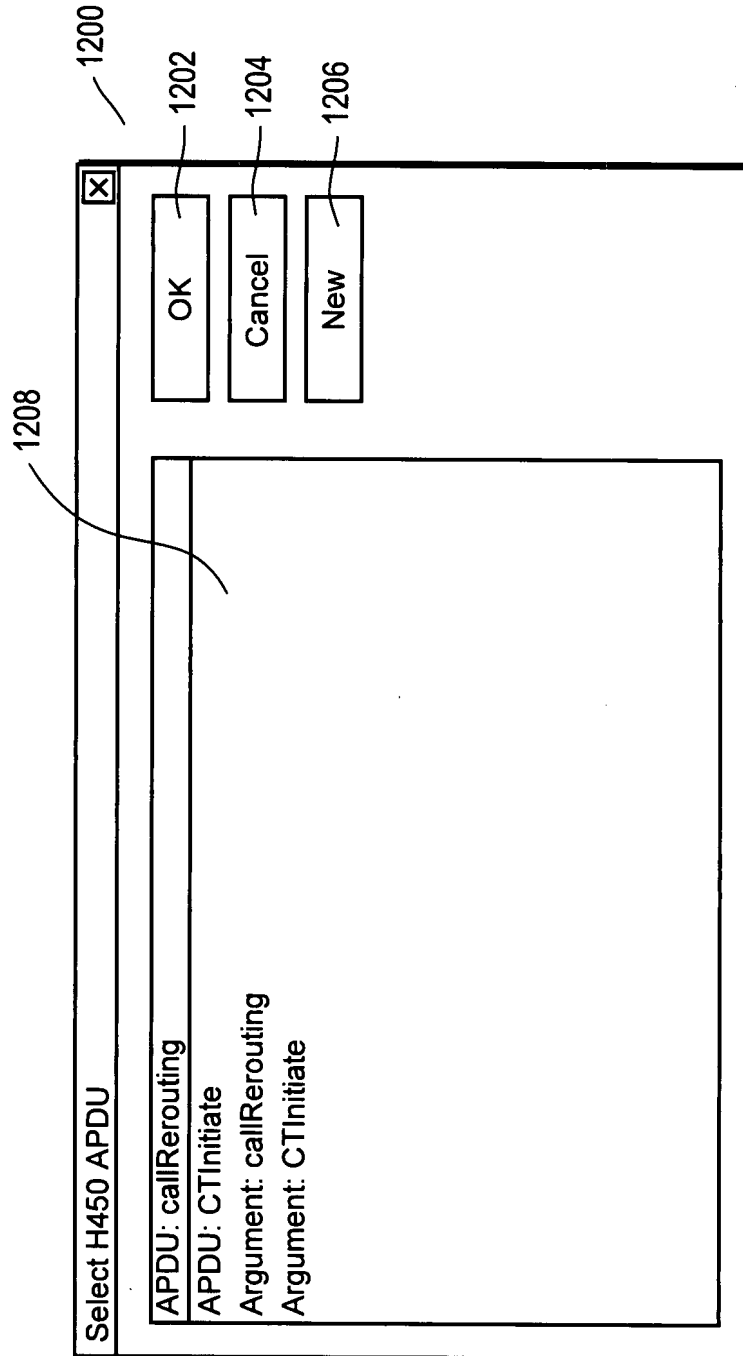


FIG. 12A

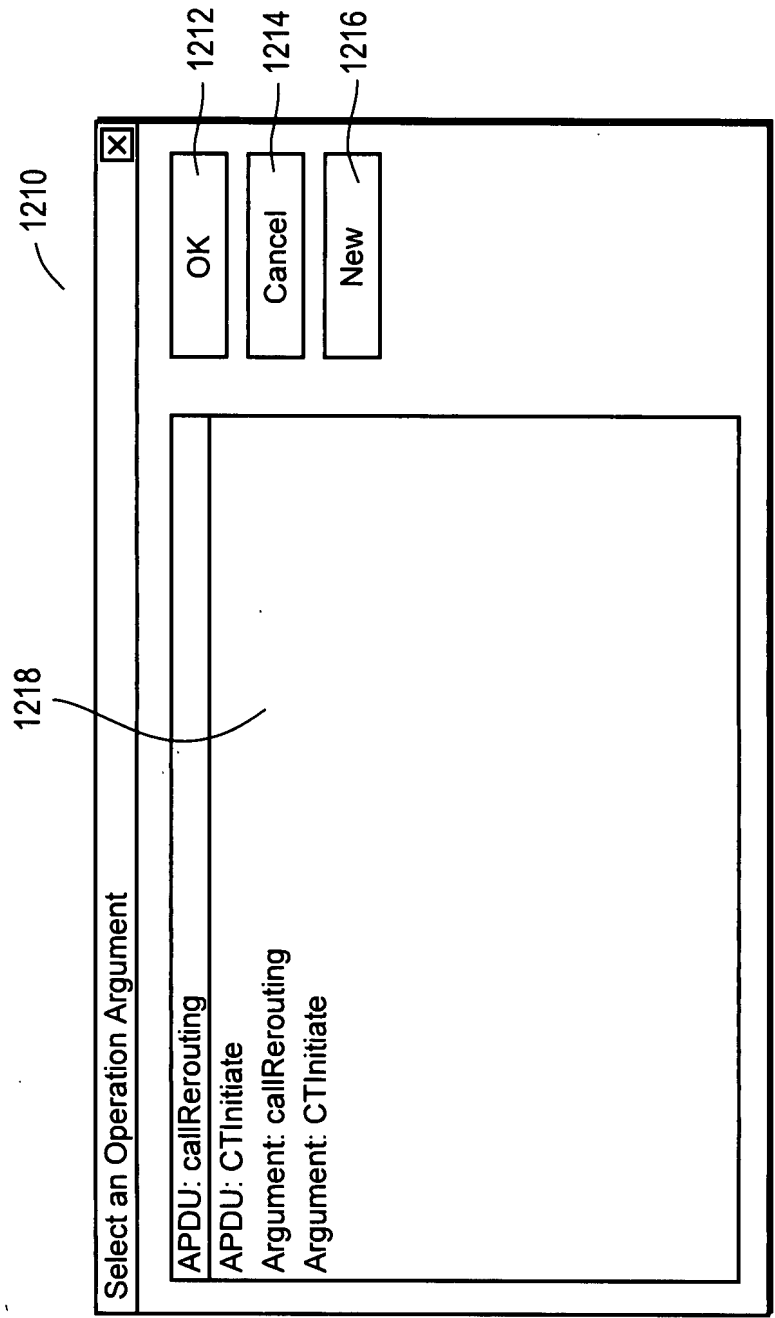


FIG. 12B

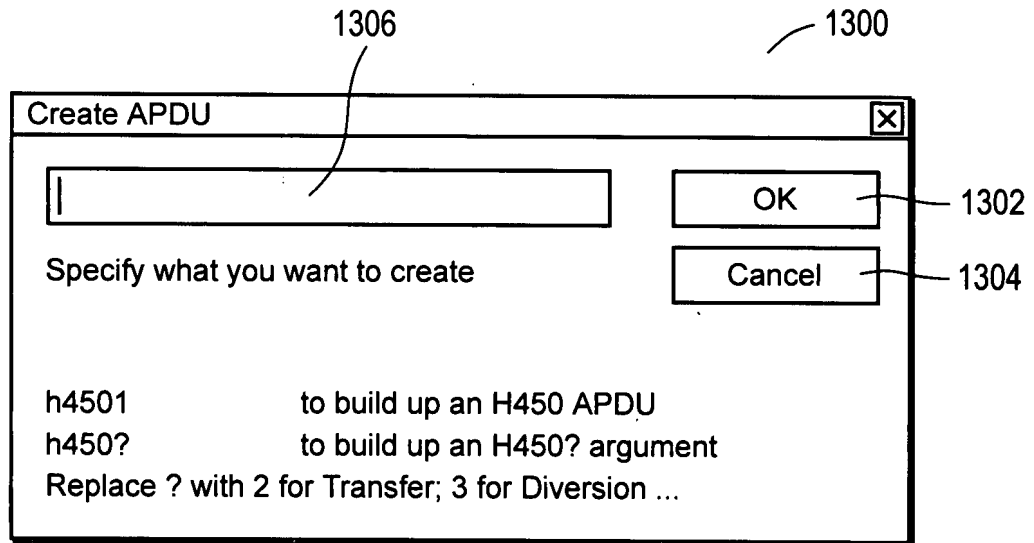


FIG. 13

REPLACEMENT SHEET

14/14

H450 Test Client

1400

v1.5 h450 test client.doc

Untitled - H450 APDU Builder

File Help Save

Save

Syntax Tree	Type	Value	from to
h450SupplementaryService	Sequence		
networkFacilityExtension	Sequence		
sourceEntity	Choice		
andpoint	Null		
anyEntity	Null		
sourceEntityAddress	Choice		
e164	IA5String	30001	1..128
h323-ID	BMPString		1..256
urHD	IA5String		1..512
transportID	Choice		
email-ID	IS5String		1..512
partyNumber	Choice		
destinationEntity	Choice		
endpoint	Null		
anyEntity	Null		
destinationEntityAddress	IA5String		
e164	BMPString	30002	1..128
h323-ID	IA5String		1..256
urHD	Choice		1..512
transportID	Choice		
email-ID	IA5String		1..512
partyNumber	Choice		
interpretationApdu	Choice		
discardAnyUnrecognizedInvokePdu	Null		
clearCallAnyInvokePduNotRecognized	Null		
rejectAnyUnrecognizedInvokePdu	Null		
serviceApdu	Choice		
rosApdus	SequenceOf		
1	Choice		
invoke	Sequence		
invokeld	Integer	1	0..0
linkedId	Integer	1	0..0
opcode	Choice		
local	Integer	9	0..0
global	ObjectIdentifier		
argument	<unknown>		

????

FIG. 14